

# ACI

## Water heaters

Easy-to-handle grip

High density insulation foam

Optimised stainless steel outlet pipe

Temperature sensor and temperature cut-out

Enamelled steel glove

Electronic thermostat

High quality enamelled tank

Impressed current titanium anode


Dry ceramic heating element

Inlet diffuser

Internal knob regulation

SYSTEM  
**ACI** anti-corrosion integrated

The Atlantic ACI electronic protection system with titanium anode (Anti-Corrosion Integrated)

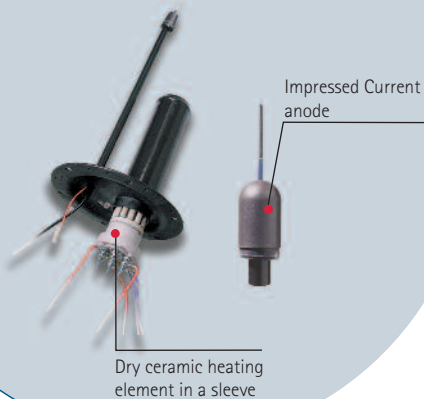



## Ratings and dimensions

### Vertical range

Capacity (L)	Output (W)	Voltage (V)	Energy consumption (kWh/24h at 65°)	Heat-up time at 60°C (Δt=50°)
50	1200	230	0,82	2h30
75	1200	230	1,08	4h10
100	1200	230	1,30	5h37
150	1800	230 <sup>(1)</sup>	1,50	5h19
200	2200	230 <sup>(1)</sup>	1,79	5h50

### Vertical accelerated range

Capacity (L)	Output (W)	Voltage (V)	Energy consumption (kWh/24h at 65°)	Heat-up time at 60°C (Δt=50°)
50	1800	230 <sup>(1)</sup>	0,82	1h46
75	3000	230 <sup>(1)</sup>	1,08	2h36
100	3000	230 <sup>(1)</sup>	1,30	2h13
150	3000	230 <sup>(1)</sup>	1,50	3h13
200	3000	230 <sup>(1)</sup>	1,79	4h00

Capacity (L)	Dimensions (mm)				P	Ø	Flange opening (Ø)	Net Weight (kg)
	A	B	C	D				
50	570	-	368	156	520	505	82 mm	21
75	700	-	580	120	530	510	82 mm	26
100	865	-	750	115	530	510	82 mm	30
150	1165	800	1050	115	550	530	82 mm	39
200	1480	800	1050	430	550	530	82 mm	49

(For other standards, consult us)

### Floor-standing range

Capacity (L)	Output (W)	Voltage (V)	Energy consumption (kWh/24h at 65°)	Heat-up time at 60°C (Δt=50°)
150	1800	230 <sup>(1)</sup>	1,56	4h40
200	2200	230 <sup>(1)</sup>	1,92	5h37
250	3000	230 <sup>(1)</sup>	2,15	5h18
300	3000	230 <sup>(1)</sup>	2,41	6h04

Capacity (L)	Dimensions (mm)				Flange opening (Ø)	Net Weight (kg)
	A	B	H	Ø		
150	300	600	1170	600	82 mm	39
200	300	600	1485	530	82 mm	47
250	300	600	1805	600	82 mm	58
300	300	640	1765	570	82 mm	66

(For other standards, consult us)

(1) Option Faciltri: 400 V\*3

