

## Product Technical Sheet

# Novel SR

## Thermostatic Power Shower

### Product Codes

Novel SR Thermostatic Power Shower	XIPSTHMSRI
------------------------------------	------------

### Installation

- Inlet connections: 15mm diameter
- Outlet connection: 1/2" BSP male thread

### Commissioning

- Simple 2 minute commissioning process

### End User

- Quiet mark awarded pumped motor technology
- Multiple cable and water entry points including the Triton Swivel Fit Water Inlet, enabling top, rear or bottom entry for ease of installation
- Thermostatic control constantly regulates the temperature providing you with precise control and a safer showering experience
- Footprint makes it an ideal replacement for existing Triton power shower models
- Start/Stop push button
- Adjustable maximum temperature stop - Reduces the risk of accidentally turning the temperature too high
- Automatic Shutdown – should either the hot or cold water supplies fail
- Large 5 spray pattern easy clean shower head
- 1.25m anti-twist hose
- Suitable for low pressure gravity fed systems only
- 2 year parts and labour guarantee



## Product Technical Sheet

# Novel SR

## Thermostatic Power Shower

### Shower

Temperature stability	Thermostatic
Voltage 230/240V Ac.	Rating 53W nominal
Controls	Top control - flow & bottom control - temperature
Visual indicators	Graphics only
Inlet Connections	15mm push fit
Water Entry Points	Rising, falling, back
Outlet Connection	½" BSP male thread
Plumbing System Compatibility	Low pressure gravity
Minimum Head Height	75mm
Maximum Head Height	10m
Maximum Open Outlet Flow Rate	14l/min
Surface Mounted Only	
Approvals, Complies with	BEAB, CE, UKCA, BSI Kitemark, Quiet Mark
Guarantee	2 year


\*Recommended minimum running pressure/flow for full performance 1 bar @8l/min

### Riser Rail Kit

Length	530mm (480mm between brackets)
Diameter	21mm
Material	Chrome Plate Stainless Steel
Finish	Chrome Rail & White Brackets
Hose	1.25m anti-twist double interlocked stainless steel

### IMPORTANT MAINTENANCE NOTICE

Replacing specified Triton accessories for this Novel SR unit will aid optimum performance and maintain a valid guarantee

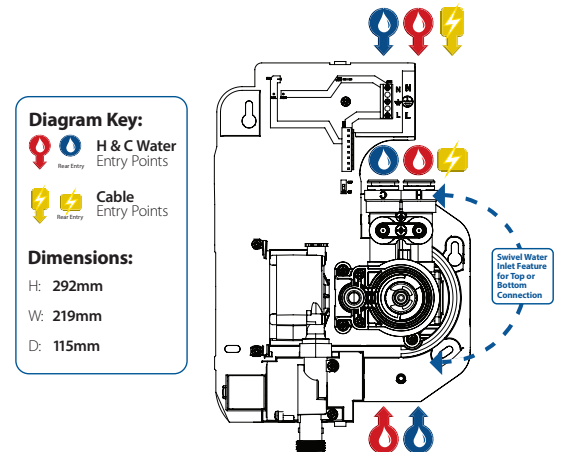

Lucas Shower Riser Rail  
TSKLUCAWC



1.25m Anti-twist Hose - Chrome  
TSHG1203



8000 | DuraFlow® - 5 Spray White  
TSHE8RCWHT

Contact our specification team

Call: 01 628 6845 | Email: sales@earthridge.ie | Web: www.tritonshowers.ie